


Product Description

The NS82275B is a high-performance, Surface Acoustic Wave (SAW) technology based band-pass filter with extremely steep skirts, simultaneously exhibiting low loss.

The NS82275B uses Chip Scale Packaging (CSP) techniques to achieve the industry standard 0.9 x 0.7 mm footprint. The filter exhibits excellent insertion loss capabilities.

Applications


- B32_n75_n76 RX Application

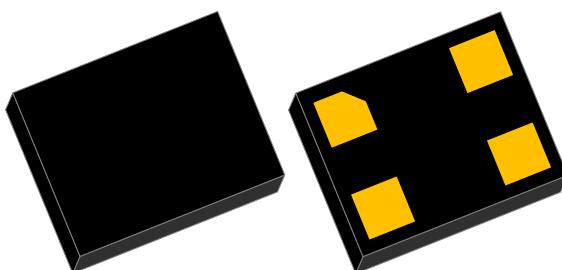

Product Features

- Low Insertion Loss
- Standard Size: 0.9 x 0.7 mm
- Operating Temperature -30 to +85°C
- Single Ended Operation
- RoHS2.0 Compliant, Halogen Free Pb-free Module Package, MSL3

Functional Block Diagram

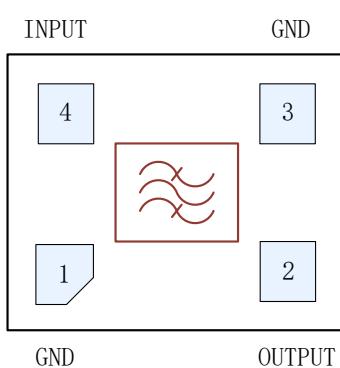

Top Thru View


Ordering Information

Part No.	Description
NS82275B	Packaged Part
NS82275B-EVB	Evaluation Board

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40°C ~ +85°C
Operating Temperature	-30°C ~ +85°C
RF Input Power	+15dBm, +50 °C for 5000 hours.
Maximum DC Voltage	3V

Testing Circuit (Top Thru View)

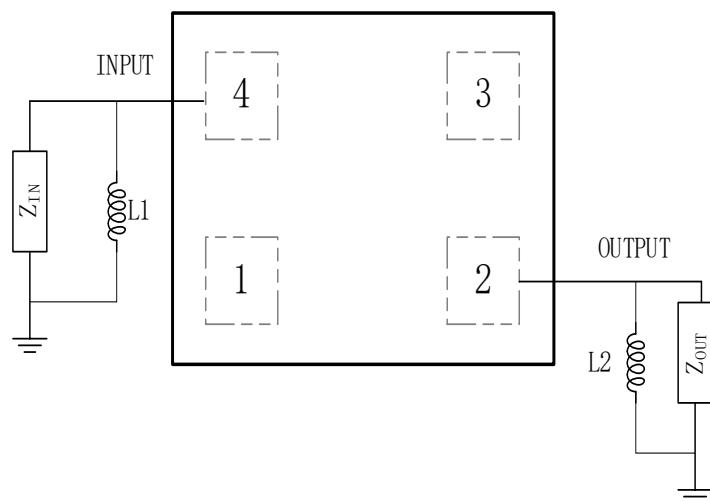

Z_{IN}	50 ohm
Z_{OUT}	50 ohm
$L1^*$	8.0 nH
$L2^*$	7.0 nH
Pin 4	Input
Pin 2	Output
Pin 1/3	GND

* Ideal Value

Electrical Specifications

Temperature range for specification: $T_c = -30 \sim +85^\circ C$

Input Terminating Condition: $Z_{IN} = 50 \text{ ohm} // 8.0 \text{ nH}$

Output Terminating Condition: $Z_{OUT} = 50 \text{ ohm} // 7.0 \text{ nH}$

Parameter	Frequency	Min.	Typ. ^[a]	Max.	Unit	Note
		-30°C to +85°C				
Insertion Loss	1427 to 1432 MHz		2.1	2.4	dB	
	1432 to 1517 MHz		2.0	2.4	dB	
	1452 to 1496 MHz		1.9	2.0	dB	
Ripple ^[b]	1427 to 1517 MHz		0.9	1.3	dB	
VSWR_INPUT	1427 to 1517 MHz		1.9	2.0		
VSWR_OUTPUT	1427 to 1517 MHz		2.1	2.2		
Attenuation	703 to 748 MHz	41	44		dB	B28 TX
	800 to 915 MHz	37	40		dB	B8 TX
	1342 to 1367 MHz	41	45		dB	
	1367 to 1392 MHz	40	43		dB	
	1550 to 1607 MHz	21	41		dB	
	1710 to 1785 MHz	36	39		dB	B3 TX
	1850 to 1910 MHz	35	38		dB	B2 TX
	1920 to 1980 MHz	35	38		dB	B1 TX
	2400 to 2500 MHz	41	44		dB	WIFI 2.4G
	2500 to 2570 MHz	40	44		dB	B7 TX
	2854 to 3034 MHz	45	47		dB	
	4281 to 4551 MHz	35	38		dB	
	4900 to 5950 MHz	32	35		dB	WIFI 5G
	5708 to 6068 MHz	32	35		dB	
	5950 to 8000 MHz	26	29		dB	

[a]. Typical data is the worst value of the parameter over the indicated band at $+25^\circ C$.

[b]. Ripple is the difference between the max and min value in passband.

Typical Transmission Coefficient (+25°C)

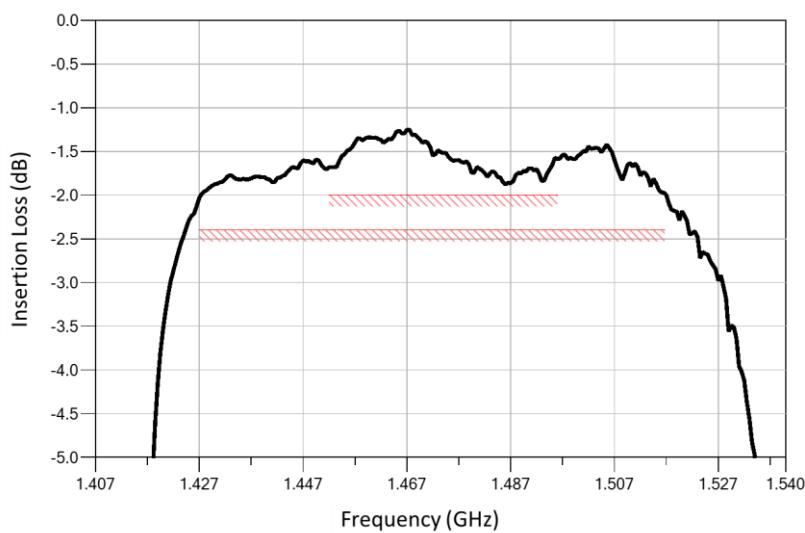


Figure 1. Passband Insertion Loss, 1427 – 1517 MHz

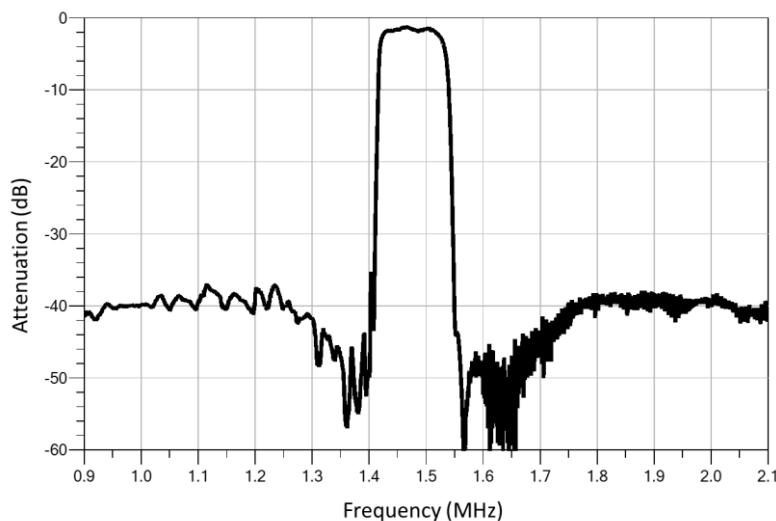


Figure 2. Narrow Band Attenuation, 900 – 2100 MHz


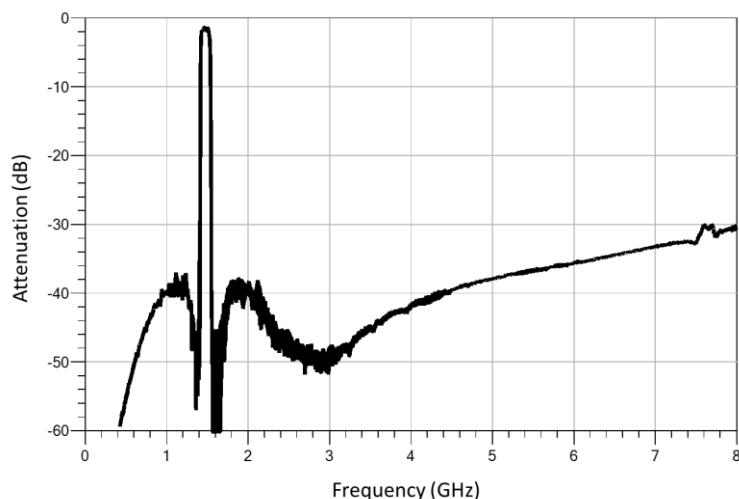


Figure 3. Wide Band Attenuation, 450 – 8000 MHz

Package & Dimensions (Unit: mm)

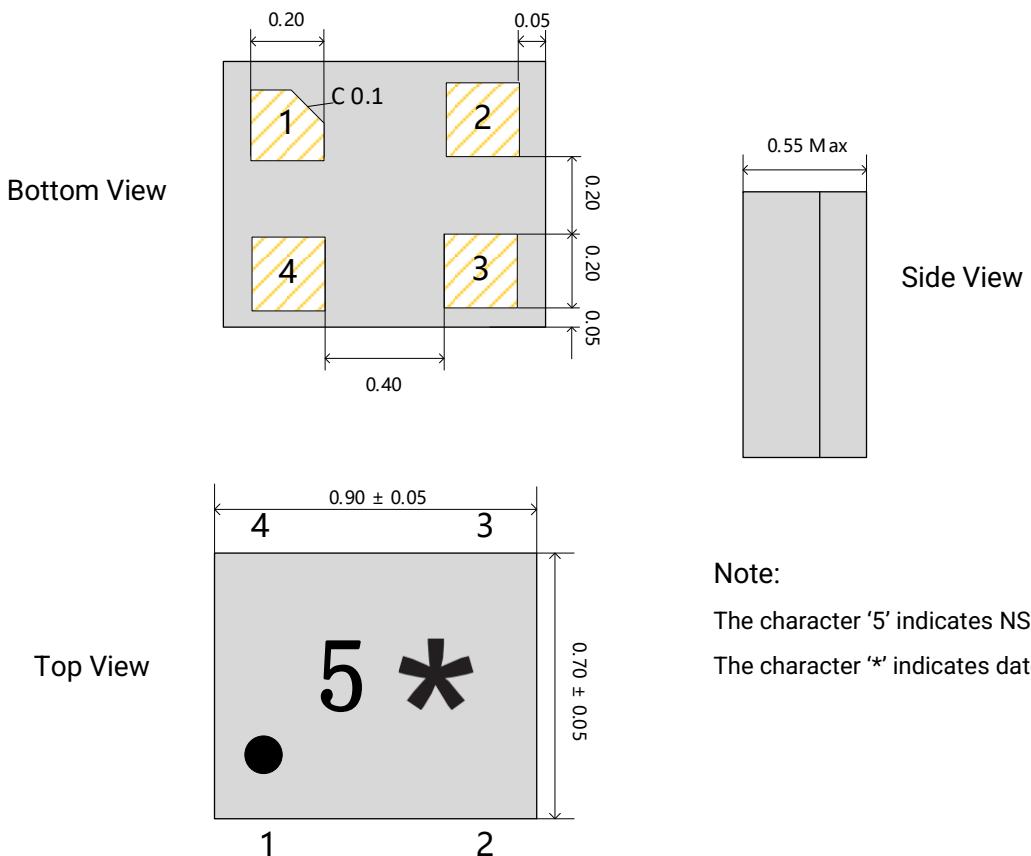


Note:




The character '5' indicates NS82208A.

The character '*' indicates date code.

PCB Mounting Pattern (Unit: mm)

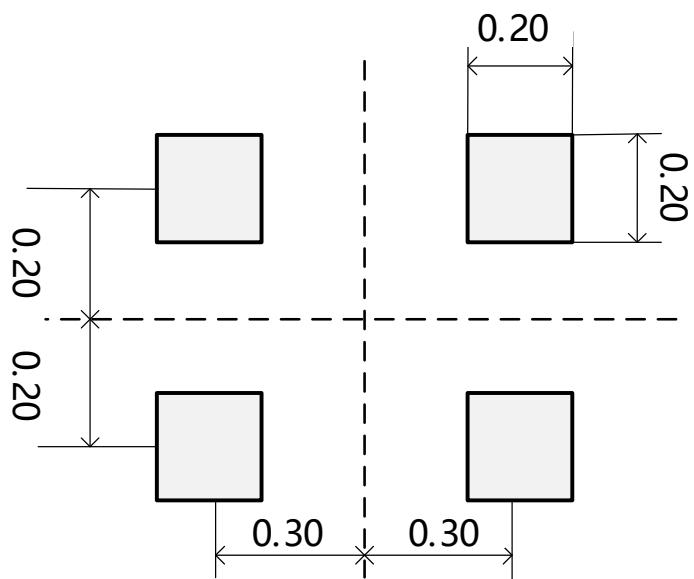


Tape and Reel Information (Unit: mm)


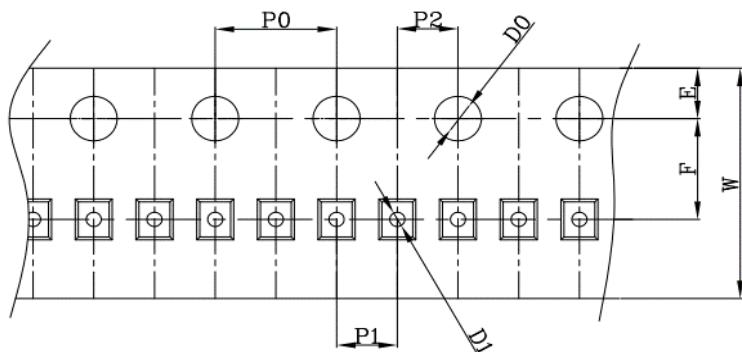


A0	0.81+/-0.05	T	0.20+/-0.03
B0	1.02+/-0.05	E	1.75+/-0.10
K0	0.65+/-0.05	F	3.50+/-0.05
P0	4.00+/-0.10	D0	1.55+/-0.05
P1	2.00+/-0.05	D1	0.50+/-0.10
P2	2.00+/-0.05	W	8.00+/-0.10

- (1) Black antistatic composite PC.
- (2) Cumulative tolerance of 10 sprocket holes is ± 0.20 .
- (3) All dimensions meet EIA-481-E requirements.
- (4) The sector of 250mm straps shall not exceed 2mm.

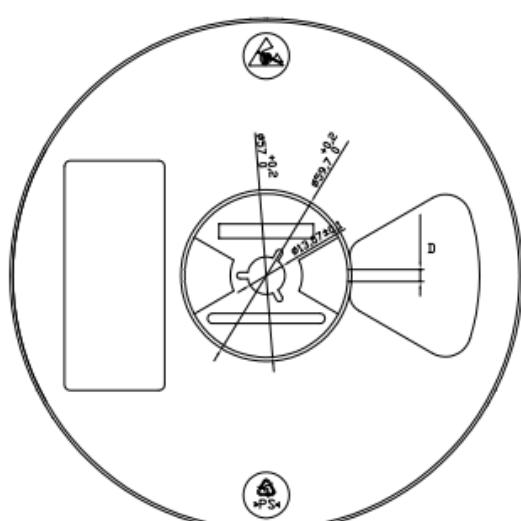

产品正面

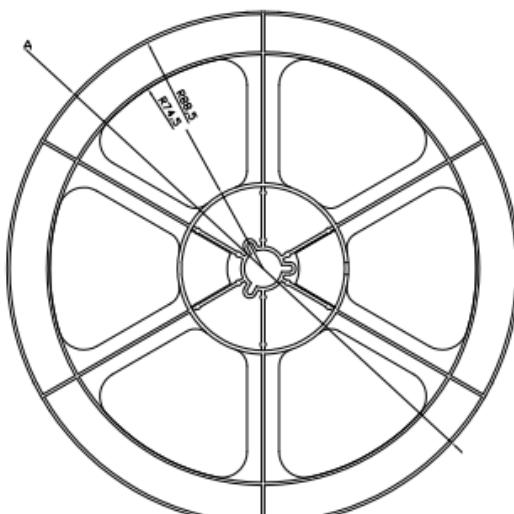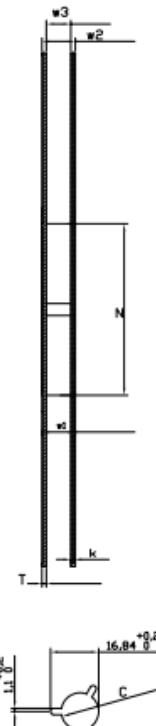


产品反面

Reeling Quantity: 10000 pcs / Reel

Type	A	N	C	D	w1	w2	w3	T	k
8mm	$\phi 180^{+2}_{-2}$	$\phi 60^{+1}_{-1}$	$\phi 13.1^{+0.2}_{-0.2}$	$\phi 4.2^{+0.5}_{-0.5}$	8.4^{+1}_{-0}	11.6^{+1}_{-1}	8.75^{+1}_{-1}	$1.5^{+0.15}_{-0.15}$	$1.25^{+0.1}_{-0.05}$

Recommended IR Reflow Profile

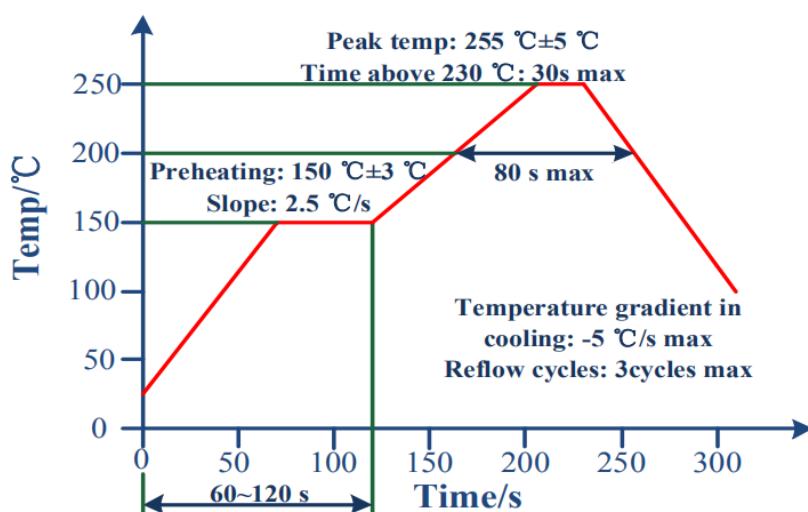

Important Notes

1. All data or information contained herein are subject to change without prior notice. Please contact NEWSONIC for verifying details of product specification before ordering NEWSONIC product.
2. Customers need to know all NEWSONIC products are for consumer market (Mobile-phone, PC-tablet, AP router or other general product). NEWSONIC products are not warranted or authorized for use as critical components in aircraft, plane, medical, life-saving and other high-reliability application environment which can cause severe results such as death.
3. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.
4. Not to be used, duplicated, reproduced, modified, republished and revealed in whole or in part to others without the express written permission of NEWSONIC.
5. NEWSONIC reject any liability or product warranty for engineering samples, so please don't use NEWSONIC engineering samples for mass-production.